




MONTÁŽNÍ NÁVOD

Tiskopis č. DS 1410/CZ/1204



DEHNventil® DV 2P TT 255

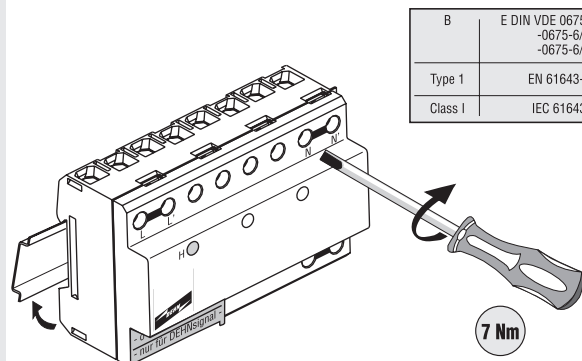


B	E DIN VDE 0675-6: ... -0675-6/A1: ... -0675-6/A2: ...
Type 1	EN 61643-11: ...
Class I	IEC 61643-1: ...

Technické údaje

U_c	255 V / 50 Hz
I_{fi}	50 kA _{ef}
I_{imp} (10/350μs)	25 kA (L ⇒ N); 50 kA (N ⇒ PE); 50 kA (L+N ⇒ PE)
max. $\Rightarrow$	125 A gL/gG (zapojení „V“)
max. $\Rightarrow$	315 A gL/gG (zapojení „T“)
9° C	-40°C ... + 80°C (... +60°C see Fig. 1)
IP-Code	20
min. $\square$ L, L', N, N', PE, $\downarrow$	10 mm ²
max. $\square$ L, N, PE	35 mm ²
max. $\square$ L', N', $\downarrow$	25 mm ²
$\square$	16 mm ² Cu $\geq 15,5$ mm


Energetická koordinace

DIN V VDE V 0185-4: ...
IEC 62305-4: ...

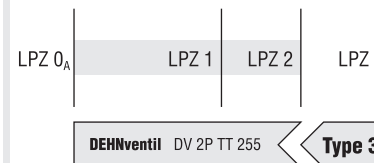


SPD Type 3
acc. EN 61643-11: ...


Signalizace funkčnosti

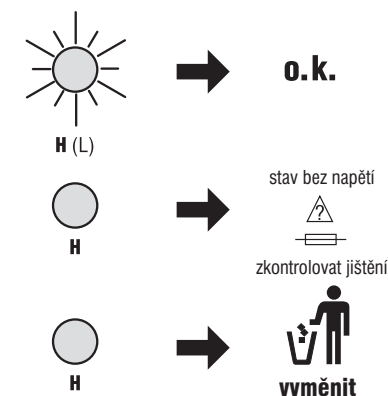

Obr. 1 Sériové zapojení v síti TT (1+1) (zapojení „V“)

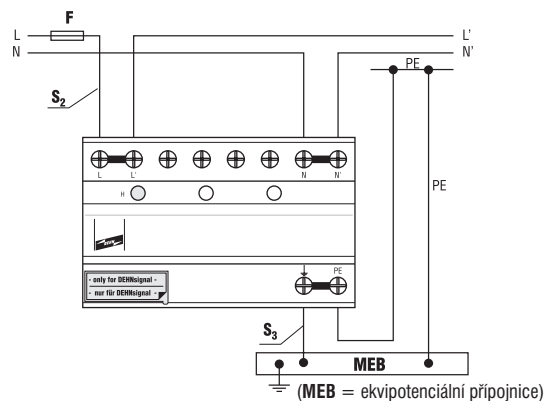


Předjištění/průřezy přírodních vodičů




Fuse F A gL / gG	S ₂ / mm ²	S ₃ / mm ²
25	10	16
35	10	16
40	10	16
50	10	16
63	10	16
80	16	16
100	25	16
125	35	16


Mechanické upevnění/připojení

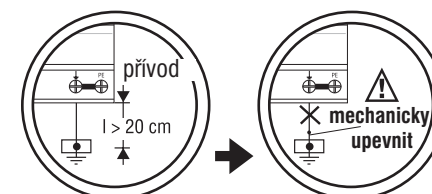

Obr. 2 Paralelní zapojení v sítích TT (1+1) (zapojení „T“)

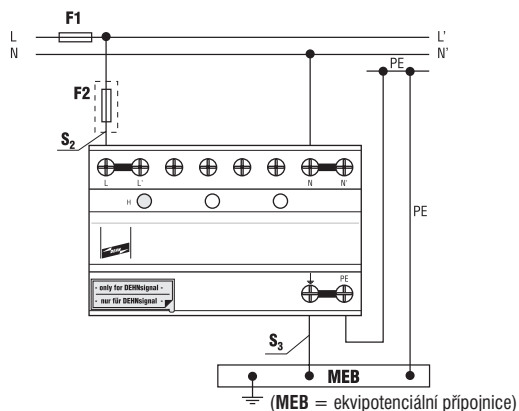


Předjištění/průřezy přírodních vodičů



Fuse F1 A gL / gG	S ₂ / mm ²	S ₃ / mm ²	Fuse F2 A gL / gG
25	10	16	---
35	10	16	---
40	10	16	---
50	10	16	---
63	10	16	---
80	10	16	---
100	16	16	---
125	16	16	---
160	25	25	---
200	35	35	---
250	35	35	---
315	50	50	---
>315	50	50	315

Obr. 3 Dálková signalizace funkčnosti

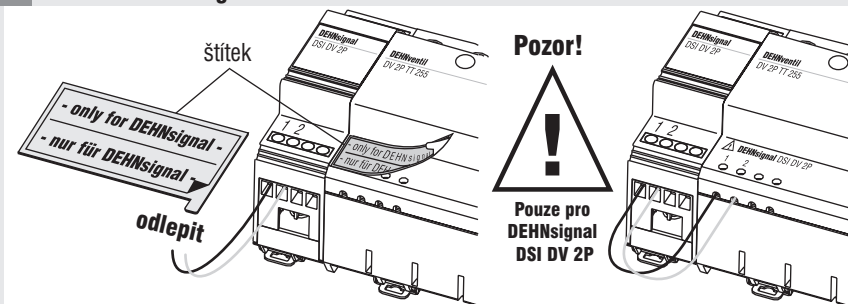

Detailní informace
viz montážní návod č. 1421/CZ

svorkovnice | DEHNventil DV 2P TT 255
svorka č. | 1, 2