





MONTÁŽNÍ NÁVOD

Tiskopis č. DS 1165/CZ/0403



DEHNport DP 255

B	E DIN VDE 0675-6: ...
	-0675-6/A1: ...
trída I	IEC 61643-1: ...

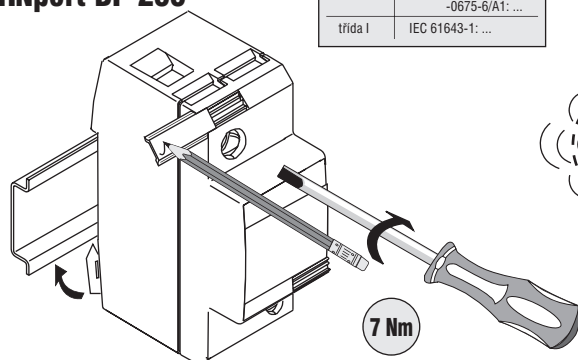

vyfouknutí
oblouku

Technické údaje

U_C	255 V / 50 Hz
$I_f (U_C)$	4 kA _{RMS}
max. I	250 A gL/gG
$\vartheta^\circ\text{C}$	-40°C ... +80°C
IP-Code	20
max. L, N	35 mm ² 50 mm ²
min. L, N, PE	10 mm ²
	16 mm ² Cu $I \geq 15,5$ mm

Předjištění/průřezy přívodů


DEHNport DP 255

F1	F1 > 250 A gL / gG ↓
F2	F2 = 250 A gL / gG ↓ F2 ≤ 250 A gL / gG ↓ F2


pojistka F1 A gL / gG	S ₂ / mm ²	S ₃ / mm ²	pojistka F2 A gL / gG
25	10	16	---
35	10	16	---
40	10	16	---
50	10	16	---
63	10	16	---
80	10	16	---
100	16	16	---
125	16	16	---
160	25	25	---
200	35	35	---
250	35	35	---
> 250	> 35	35	250

S₃ min. 16 mm² Cu


Zapojení v síti TN-C

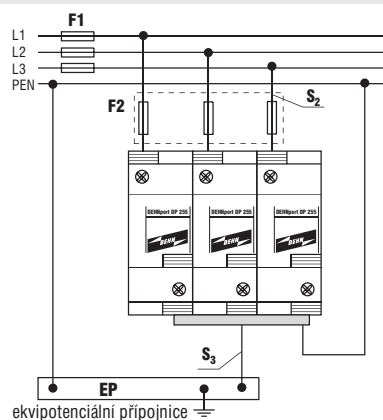


Zapojení v síti TN-S

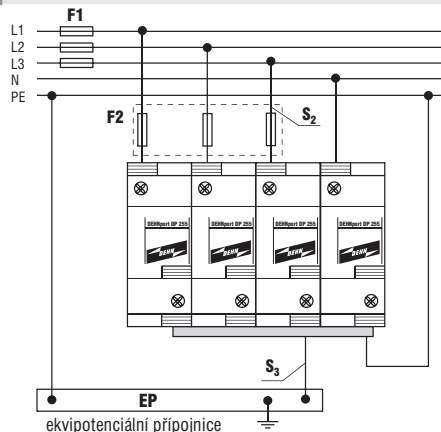


Zapojení v síti TT (3+1)

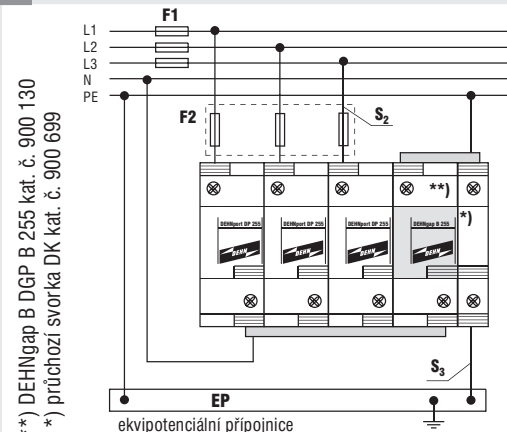


Zapojení v síti IT

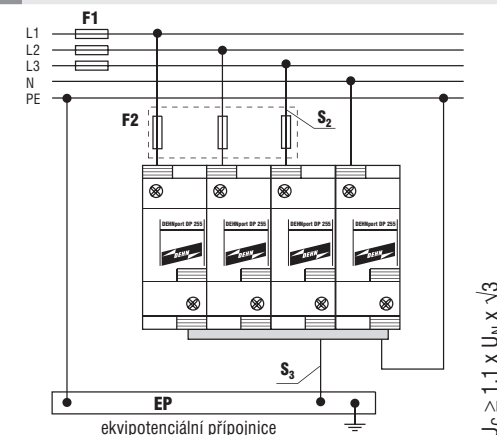


Mechanické upevnění přívodů

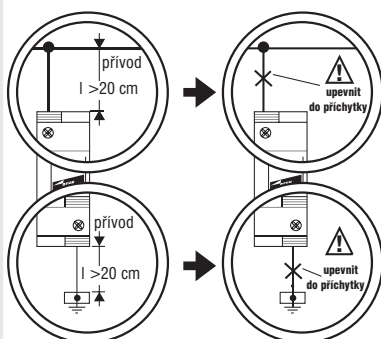

Bezpečnostní vzdálenosti




vyfouknutí oblouku



obr. a

obr. b

Energetická koordinace

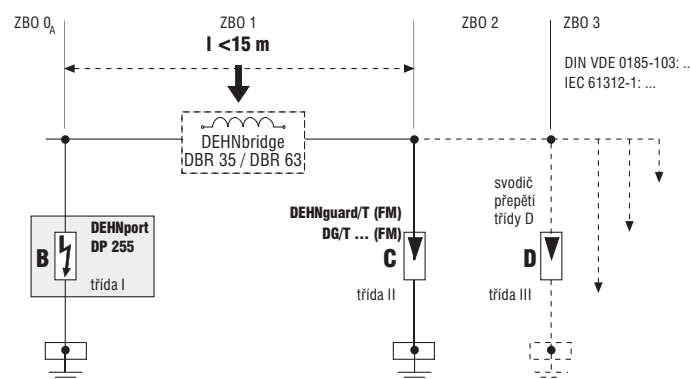

Kontrola

